

vivitek
NovoConnect

Wireless Collaboration.
Connect. Work. Share.



Transform your conference room into a true collaborative space.



Vivitek's NovoConnect Solution enables users to wirelessly connect to the big screen from the laptop, tablet, or smartphone of their choice. Up to four users can easily share screens simultaneously. Innovative annotation tools make it easy for everyone to join in the conversation. Snapshot and wireless file sharing functionalities help keep everyone in the loop, driving productivity and collaboration.

Connect into one simple idea



CONNECT

Connect and mirror any device onto the main screen with easy guest access thanks to LauncherPlus.



WORK

Engage instantly with all participants – share files, share ideas and collaborate successfully.



SHARE

Share up to 4 screens at once, while 64 users can be connected to contribute and annotate ideas.

NovoConnect Solution

Features Summary:

Simple & Easy to Connect



Cable-free presenting eliminates the hassle so you can get going in seconds.



Cross-platform screen mirroring lets everyone share from any device.



Quickly connect mobile devices using QR codes and the NovoPresenter app.



Optional USB Launcher modules for direct connectivity from any laptop with zero impact on your network.

Discussion & Collaboration



Invigorate your meetings by sharing up to 4 screens simultaneously, with up to 64 participants connected and ready to switch instantly.



Comment and collaborate in real time with digital annotation and highlighting.



Wirelessly share files, meeting minutes and snapshots with all participants.



Easy to use Moderator function keeps you in control of the agenda.

Productivity & Privacy



Start your meeting with a customized home screen, featuring your logo or connection instructions.



With AES encryption and dual network management, security comes first.



Privacy and security are ensured thanks to PIN-protected guest access.




Dual-band WiFi and 2T2R connectivity ensure a high standard of quality and performance.

The Vivitek NovoConnect range offers the most complete wireless collaboration solutions in the market. From stand-alone devices such as NovoPro and NovoEnterprise to fully integrated All-in-One solutions such as the popular NovoTouch flat panels and coming soon the first NovoProjector.

NovoConnect offers flexibility and easy implementation within the existing infrastructure of any meeting room. Employees and guests can easily share content on the main screen, leading to effective and productive meetings and energized collaboration. Supporting the Bring Your Own Device concept, the connection to the main screen is easy using

the NovoPresenter app on mobile devices, or the Desktop Streamer software for laptops. For added ease, the Launcher modules offer direct Wi-Fi connection for guests and employees, now also featuring the LauncherOne for locked USB ports to still enable easy access in even the most secure requirements.

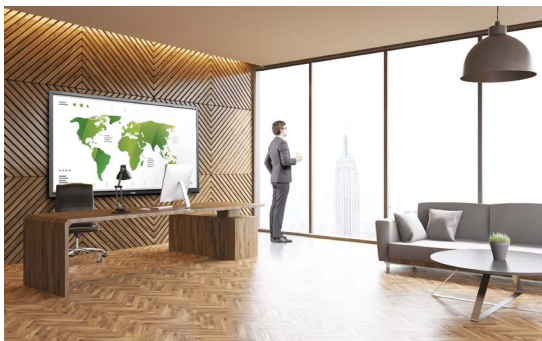

CEO office

A NovoTouch flat panel display in the CEO's office enables instant connection to discuss and share ideas with team members or important clients.



Mid-size meetings

In medium-size meeting rooms, NovoPro with LauncherPlus enables guests to connect wireless and share content directly from their laptop without any IT support.



Conference room

The big conference room is where the whole office comes together. With one NovoEnterprise and four LauncherPlus units everyone can connect and collaborate with ease.

NovoTouch

NovoTouch is a wireless collaborative touchscreen, designed for effective meetings. An all-in-one premium choice available in various sizes, NovoTouch integrates NovoConnect as well as NovoDS functionality, enabling it to also create dynamic digital signage in meeting rooms and in public spaces. NovoTouch features the NT Livescreen function, which allows screen mirroring streamed in real-time to multiple NovoTouch or NovoEnterprise devices.



NovoPro

NovoPro is designed to be integrated into the existing network and deployed to multiple rooms. Integrate NovoPro with any existing display equipment, such as projectors. Suitable for every meeting room from small to large, with LAN integration. NovoPro works with all optional Launcher Modules.



NovoEnterprise

NovoEnterprise is the ideal companion for a meeting room projector, or screen - ensuring optimal standalone WiFi performance, thanks to the enhanced hot spot antenna. Suitable for large meeting rooms and guest access venues, especially suited for use with the optional Launcher modules.



LauncherPlus **USB-A** or **USB-C**

The LauncherPlus connects to any laptop, establishing a direct WiFi connection to any NovoConnect device. Intended for guests, LauncherPlus streamlines and secures the connection process, with zero impact on the existing network. The LauncherPlus is available with USB-A or USB-C connectivity.



LauncherOne

LauncherOne is specifically designed for companies with strict Data Loss Prevention (DLP) and IT security policies that lock the laptop USB port for storage devices and do not allow corporate network-based wireless presentation solutions. The LauncherOne enables meeting connectivity and collaboration while maintaining full data integrity and network security. In order to create the connection, the IT department can preauthorize and distribute the LauncherOne portable app to the employee laptops. Download from <https://www.launcherone.io/>





	NovoTouch LK6530i	NovoTouch LK7530i	NovoTouch LK8630i
Display Technology	Backlit LED (IPS Panel)	Backlit LED (IPS Panel)	Backlit LED (IPS Panel)
Panel Size; Aspect Ratio	65", 16:9	75", 16:9	86", 16:9
Brightness	350cd/m ²	330cd/m ²	330cd/m ²
Contrast Ratio (Typical)	1,200:1	1,200:1	1,200:1
Native Resolution	4K Ultra-HD (3840 x 2160)		
Viewing Angle (Horiz/Vert)	178°/178°		
Refresh Rate (Hz)	60Hz	60Hz	60Hz
Display Color (Bit)	1.06 billion (10-bit)		
Orientation	Landscape		
Touch Technology	Infrared Touch		
Touch Points	10 Writing, 20 Touch	10 Writing, 20 Touch	10 Writing, 20 Touch
Surface Protection	4mm Thick Toughened Glass (Level 7H on Mohs Scale of Mineral Hardness)		
Minimum Touch Object	Single-Touch ≥Φ6mm and Multi-Touch ≥Φ8mm		
Touch Tools	Finger, Stylus, Glove, Opaque Objects		
Gestures Supported	Yes		
System Version	Android™ v6.0	Android™ v6.0	Android™ v6.0
CPU	RK3399, Dual-Core ARM® Cortex® A72 and Quad Core ARM® Cortex® A53		
GPU	Mali™ T860	Mali™ T860	Mali™ T860
RAM	4GB DDR3	4GB DDR3	4GB DDR3
Internal Storage	16GB	16GB	16GB
OS Compatibility	Windows® (Windows 7 and above: Driver Free), macOS (10.10 and above), Android™ (2.2/2.3/4.0/4.1/4.2 (Kernel v3.5 and above - Driver Free), Chrome (v39 and above), Linux (Kernel v3.5 and above)		
I/O Ports	HDMI v2 (x1), HDMI v1.4 (x2), DisplayPort (x1), VGA-In (x1), Audio-In (3.5mm) (x1), AV-In (x1), HDMI-Out (1080P) (x1), Audio-Out (3.5mm) (x1), Coaxial-Out (RCA) (x1), LAN (RJ45) (x1), RS232 (x1), USB Type A 2.0 (x4), USB Type A 3.0 (x2), USB Type B (x2)		
Internal Speakers	12W (x2) (Stereo)	12W (x2) (Stereo)	12W (x2) (Stereo)
Power Supply (Internal)	AC 100-240V, 50/60Hz		
Dimensions	1,521 x 915 x 99 mm	1,762 x 1,034 x 101 mm	1,988 x 1,178 x 99.6 mm
Weight (Net)	46 kg	60 kg	78 kg
Weight (Gross)	60.4 kg	84.2 kg	111.2 kg
Accessories (Standard)	AC Power Cord, VGA Cable, USB Cable, Audio Cable, Stylus (x3), Remote Control, Wall Mount Kit, Documentation Kit		



	NovoPro	NovoEnterprise
Model	NP2000	NE3000EU
Support Operating System	Windows 7 / 8 / 10 (32 bits and 64 bits), macOS 10.7 and above, iOS 7.0 and above, Android 4.0 and above, Chromebook 37+	
Desktop Streaming	up to 1080p, 60 fps	
Screen Mirroring	Google cast for Android, AirPlay for iOS	
WiFi	802.11ac, b/g/n 2.4GHz & 5GHz, 2T2R	802.11ac, b/g/n, 2.4GHz & 5GHz, 2T2R with external antenna
Output Resolution	HD1080p (1920 x 1080), WXGA (1280 x 800), HD720p (1280 x 720), XGA (1024 x 768)	
Output	HDMI-Out	HDMI-Out; Audio-Out 3.5mm mini jack
Input	Ethernet RJ45; USB Type A; MicroSD Slot; MicroUSB Power-In	Ethernet RJ45 (PoE); USB Type A x 2; MicroSD Slot; HDMI-In; Audio-In 3.5mm mini jack; DC Jack Power-In
Security	Dual Network, AES-256 encryption, Kensington lock	
Dimensions (L x W x H)	120 x 75 x 16 mm	165 x 123 x 21 mm
Weight	128 g	250 g
Power	Input to AC adaptor: AC 100-240V, 50/60Hz. Output from AC adaptor: 5V/2A, Consumption: 10W.	



	LauncherPlus	LauncherPlus USB-C Edition	LauncherOne
Model	QL300EU	WQL-320EUV	WQL-340EUV
Connector	USB-A	USB-C	USB-A
Support Operation System	Windows 7 above & mac 10.7 above		Windows 7 above & mac 10.7 above & Ubuntu 18.04
System Requirement	HID driver free; Usage without administrator privilege		
Wifi	802.11 b/g/n		
Security	AES-256 encryption		AES-256 encryption; Full Data Loss Prevention DLP compliant
Size	70 x 70 x 14 mm		
Weight	60 g		



Vivitek EMEA

Zandsteen 15 | 2132 MZ Hoofddorp | The Netherlands

tel: +31 20 800 3960 | fax: +31 20 655 0999

e-mail: info@vivitek.eu

www.novoconnect.eu

2019_01_EMEA