

COMPACT5

ANALOGUE PREAMPLIFIERS & MIXERS

Installation Analogue Mixer



PRODUCT OVERVIEW

Versatile laptop and 19" installation mixer, especially targeted to both non technical and expert users. Includes 8 ST LINE inputs, 3 MIC inputs and 2 PHONO inputs.

KEY FEATURES

- Universal 5 channel laptop and 19" installation rack mixer
- 8 LINE inputs, 3 MIC inputs, 2 PHONO inputs
- 2 independent MASTER (1x XLR / 1x RCA) and REC output
- 3 band equalizer per channel
- PFL monitoring. Talkover. Phantom power
- 45mm ECLER faders per channel


APPLICATIONS

- Pubs
- Night Clubs
- Retail Shops
- Fitness Centres

CERTIFICATIONS

- EN60065:2014
- EN55103-1:2009
- EN55103-2:2009
- 2006/95/EC
- 2004/108/CE

MECHANICAL DIAGRAMS

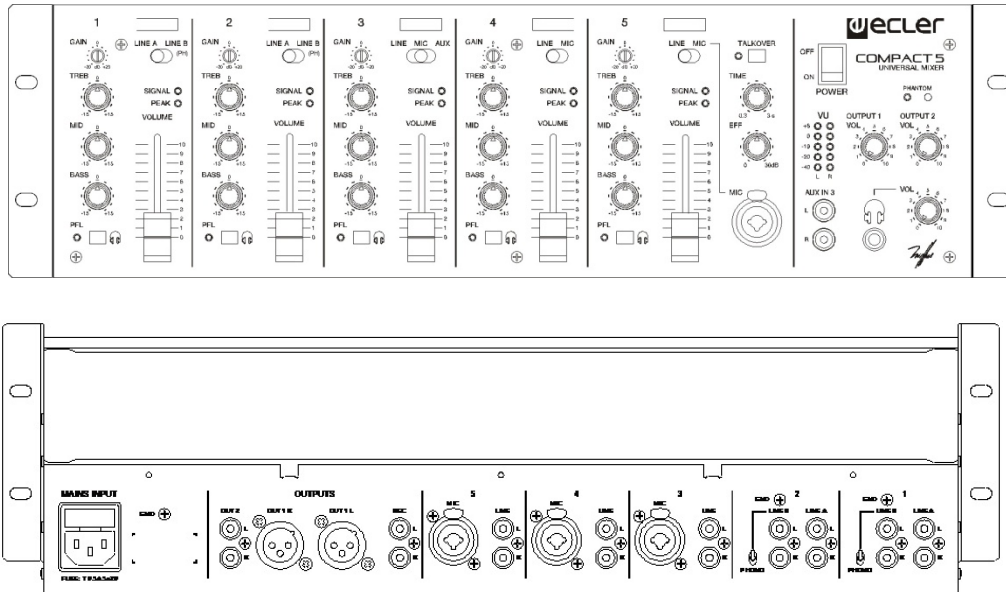

TECHNICAL DATA

Inputs Sensitivity nom/Impedance	LINE (A-B-AUX IN)	0dBV/50kΩ
	PHONO	-40dBV/50kΩ
	MICRO (BAL)	-50dBV/>1kΩ
Outputs Level/Minimum Load	OUT 1 (BAL)	0dBV/600Ω 1V
	OUT 2	0dBV/2.2kΩ 1V
	REC	0dBV/10kΩ
	HEADPHONES	230mΩ/400 Ω
Frequency Response	LINE	10Hz±30kHz -1dB
	MICRO BAL	10Hz±25kHz -1dB
	PHONO	RIAA ±0.5dB
THD+N	LINE	<0.01%
	MICRO	<0.1%
	PHONO	<0.2%
CMRR	MICRO	>70dB @ 1kHz
Signal Noise Ratio	LINE	>100dB
	MICRO	>85dB
	PHONO	>90dB
Gain control all inputs	GAIN	± 20dB
	BASS	100Hz ±12dB
	MID	1.8kHz ±15dB
Tone control	TREBLE	10kHz ±11dB
Talkover	Time	0.3 / 3 seg
	Effect	0 / -30 dB
Signal Present indicators	LINE	-40dB
	MICRO	-90dB
Clip indicators	LINE	+10dB
Phantom voltage		+18VDC/5mA max.
Mains		90-264VAC 47-63Hz
Power consumption		28VA
Dimensions	Panel	482.6x132.5mm
	Depth	200mm
Weight		3.7kg