

TAIDEN®

Economical Digital Conference System



Excellent solutions for conferences

System features

- Economical and practical, designed for small and medium-sized conference room
- Fully digital audio technology
- Main unit with USB interface and SD card slot for conference audio recording and playback
- USB_H interface for system upgrading
- USB_D interface for lossless recording or input of streaming audio from PC
- With Web page control function, main unit can be controlled through Web page
- Gain and low-cut of each microphone can be adjusted separately
- Conference main unit, with built-in monitor loudspeaker, can be directly employed in small and medium-sized meeting rooms without amplification system
- Low power consumption
- "Daisy Chain" topology



Conference unit

HCS-3938 series conference unit is refined, elegant and ergonomically designed. It can fit into any conference place while ensuring perfect acoustic performance. Conference units of the series come in two versions: chairman unit and delegate unit, featuring built-in loudspeaker, volume button and headphone jack. Fixed and removable stem microphones of different lengths are also available.

Four color options

- Champagne panel + White buttons
- Champagne panel + Champagne buttons
- Charcoal gray panel + Green buttons
- Charcoal gray panel + Charcoal gray buttons




Conference main unit


HCS-3900M conference main unit is the heart of the whole conference system, and meeting can be managed easily with its five operation modes. To each main unit, a total of 50 conference units can be connected, while the figure can be increased to 255 by adding HCS-3900ME extension unit.

Function	No.	Conference main unit		
		HCS-3900MA/20	HCS-3900MB/20	HCS-3900ME
Speech		●	●	
Audio Recording		●		
256×64 OLED		●	●	
Trunk-line cable outlet		2	2	3

With the built-in monitor loudspeaker, the main unit can be directly employed in small and medium-sized meetingrooms without amplification system




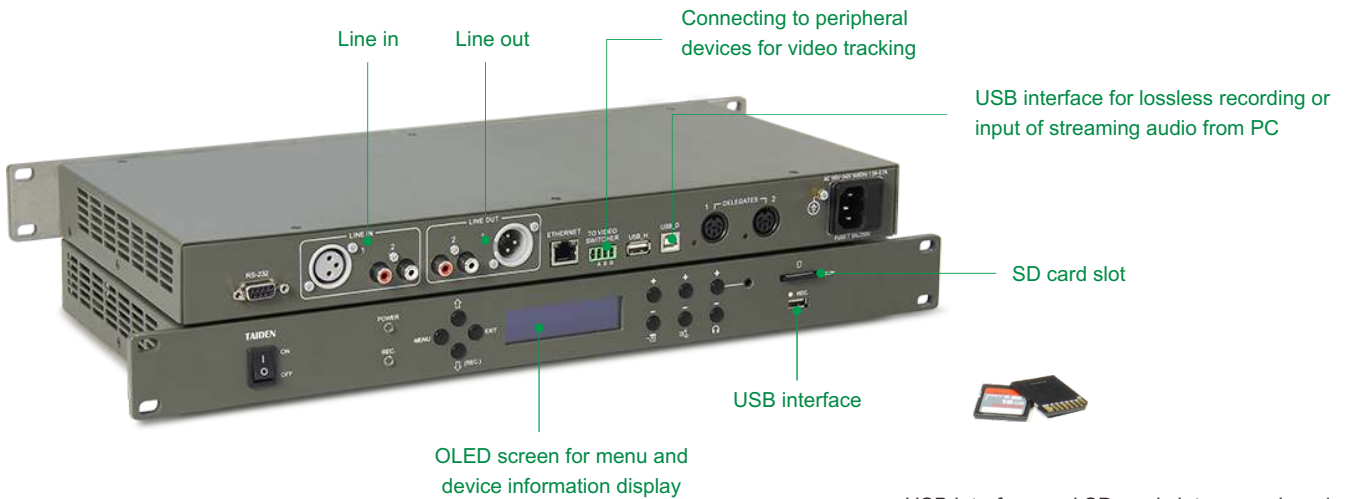


USB interface and SD card slot are equipped on main unit for conference audio recording and playback. The recording will switch to the other device when SD card or USB stick is full without interruption.

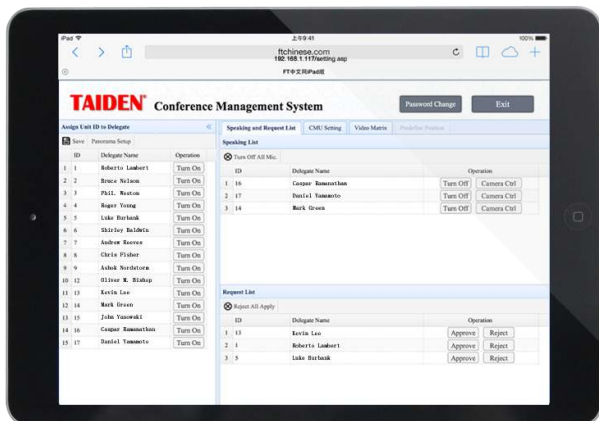

Web Control

The user can access the IP address of main unit from web browser to handle meeting management, e.g. conference unit management, speaking and request list management, CMU setting, video matrix control, predefined position setting.

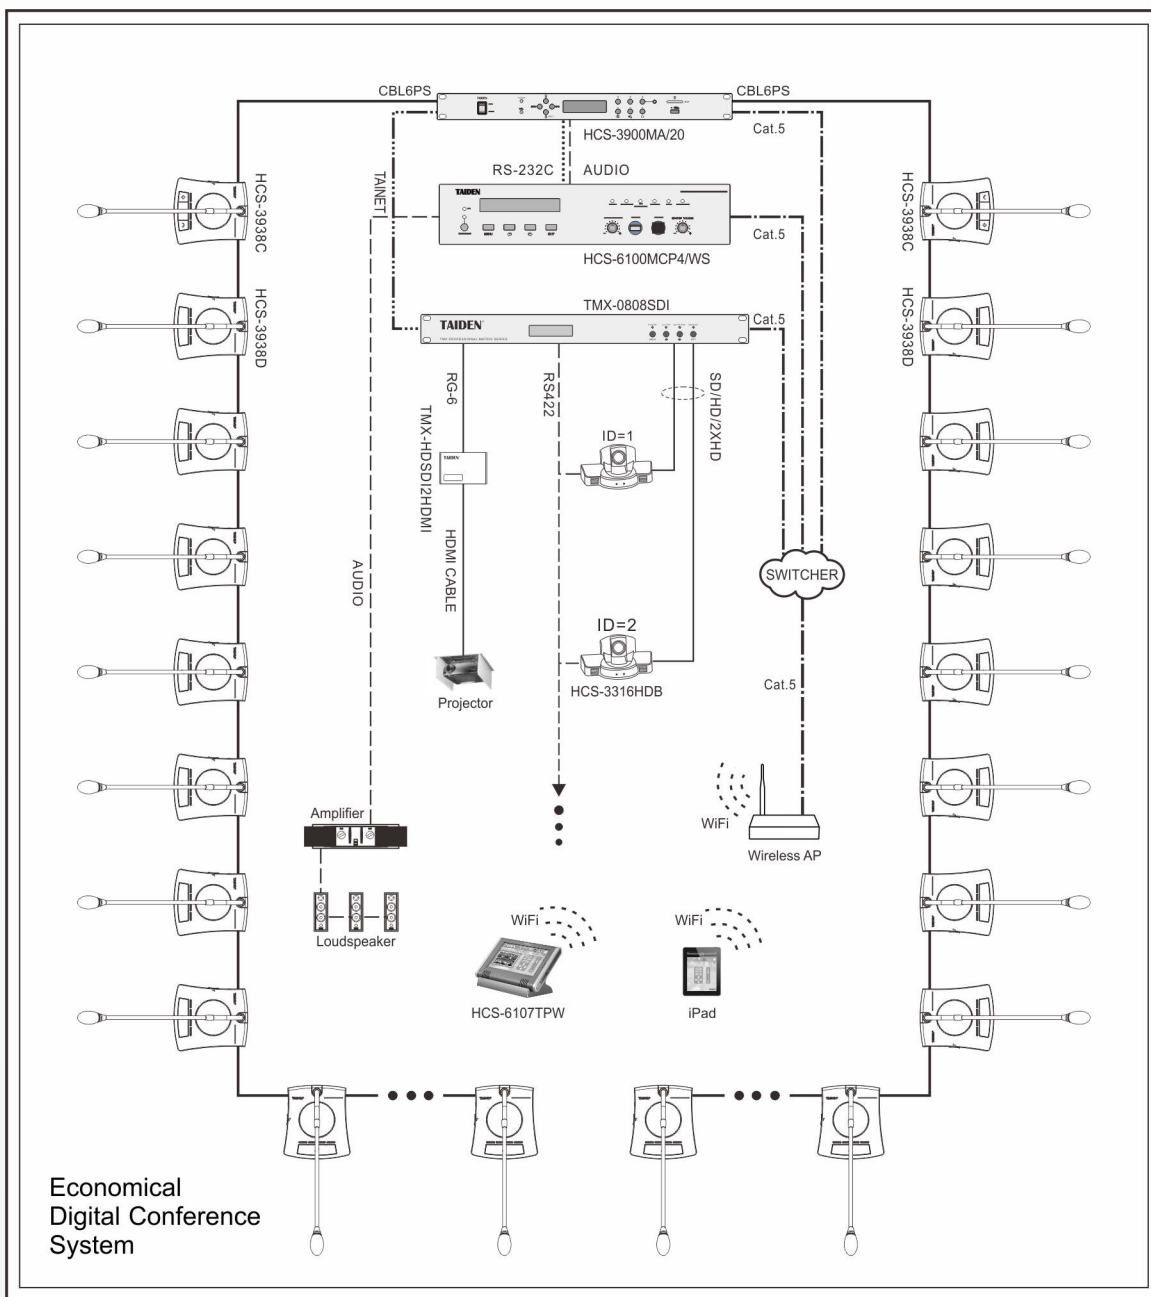

Distributed by:

EDO sp. z o.o. ul. Krasickiego 51, 58-200 Dzierżoniów
tel. 690139582, email: info@edostudio.pl



Member of International Congress & Convention Association (ICCA)

TAIDEN INDUSTRIAL CO.,LTD.
Printed in Shenzhen ©TAIDEN
Modifications reserved