


TOSHIBA



TD-E3(E) series

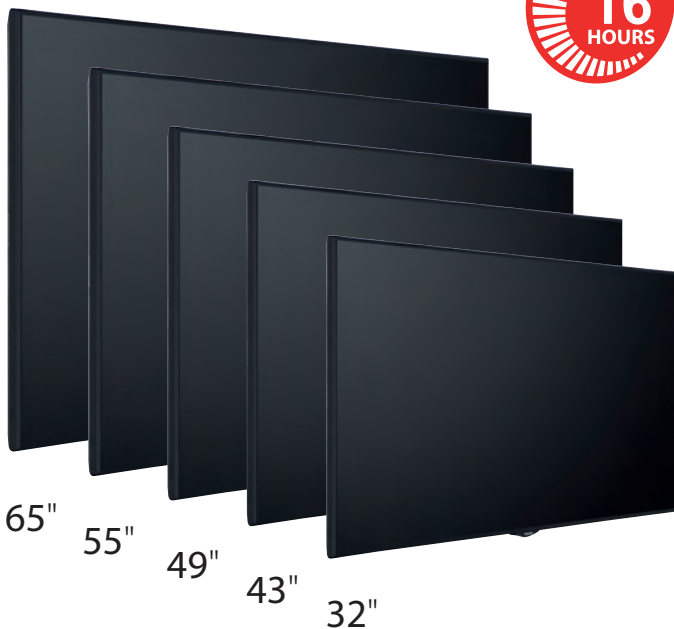


Bright, professional signage that works hard all day

Share information throughout the working day in total clarity. Perfect for the corporate, education, retail and travel sectors, TD-E3 models are robustly built to run 16 hours and beyond, seven days a week. Our displays look great in portrait or landscape orientation, offering superior picture quality in a variety of sizes. Toshiba's hidden built-in USB port* offers tamper-proof automatic playback of your audio/visuals/images, with multi-codec support. Packed with features and designed to impress the end user, displays are fully customisable.

Features

- 16/7 usage
- Full HD (65" = 4K Ultra HD)
- Landscape/portrait orientation
- OPS slot
- Embedded USB player & scheduler
- Embedded signage with built-in memory option (TD-E3E derivative model)
- Optional touchscreen available



(TD-E3E)



*TD-E323(E) does not have a hidden built-in USB port.

TD-E3(E) series - 16/7 signage



		TD-E323(E)	TD-E433(E)	TD-E493(E)	TD-E553(E)	TD-E653(E)
Screen	Diagonal Screen Size (cm/inch)	81 cm/32"	109cm/43"	124cm/49"	140cm/55"	165cm/65"
	Recommended Maximum Daily Usage (Hours)	16/7	16/7	16/7	16/7	16/7
	Portrait Mode	Yes	Yes	Yes	Yes	Yes
	Visible Area (H x V)	698.4mm (H) x 392.85mm (V)	941.184mm (H) x 529.416mm (V)	1073.78mm (H) x 604.0mm (V)	1209.6mm (H) x 680mm (V)	1428.48mm (H) x 803.52mm (V)
	Panel Resolution	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	3840 x 2160
	Panel Technology	IPS	IPS	IPS	IPS	VA
	Viewing Angle (°)	178°	178°	178°	178°	178°
	Brightness (cd/m²)	400	400	400	400	400
	Native Contrast (number)	1400	1100	1200	1200	4000
Response Time (G to G) (ms)	8.5	8	9	9	6.5	
UHD 4K (2160p)	-	-	-	-	Yes	
Inputs	HDMI	2	1	1	1	1
	HDMI Support Type	1.4	1.4	1.4	1.4	2.0
	DisplayPort	-	1	1	1	1
	DisplayPort Support Type	-	1.0/1.2a	1.0/1.2a	1.0/1.2a	1.0/1.2a
	DVI	-	1	1	1	1
	Analogue D-SUB	1	1	1	1	1
	Component	Yes (shared)	Yes (shared)	Yes (shared)	Yes (shared)	Yes (shared)
	Composite	Yes (shared)	Yes (shared)	Yes (shared)	Yes (shared)	Yes (shared)
	USB	2	3	3	3	3
	USB Support Type	Photo/Video/Music	Photo/Video/Music	Photo/Video/Music	Photo/Video/Music	Photo/Video/MP3
	Lockable USB	No	Yes	Yes	Yes	Yes
	RS232: DSub	Yes	Yes	Yes	Yes	Yes
LAN: RJ45	Yes	Yes	Yes	Yes	Yes	
Remote Extender	Yes	Yes	Yes	Yes	Yes	
OPS Slot	Yes	Yes	Yes	Yes	Yes	
Supported Input Resolutions	HDMI	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	3840 x 2160
	DisplayPort	-	1920 x 1080	1920 x 1080	1920 x 1080	3840 x 2160
	VGA (D-Sub)	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
Outputs	DisplayPort	-	1	1	1	1
	Speakers	8W + 8W	8W + 8W	8W + 8W	8W + 8W	10W + 10W
	Digital Out	Coaxial	Coaxial	Coaxial	Coaxial	Coaxial
Tiling	Multi-screen (Zoom up)	Yes	Yes	Yes	Yes	Yes
	Daisy Chain DVI	-	-	-	-	-
	Daisy Chain DisplayPort	-	Yes	Yes	Yes	Yes
	UHD Daisy chaining	-	Yes	Yes	Yes	Yes
	Tiling Matrix (x,y)	Yes	Yes	Yes	Yes	Yes
Monitor ID Setting	Yes	Yes	Yes	Yes	Yes	
External Control/Monitoring	RS232/LAN	Yes	Yes	Yes	Yes	Yes
	SNMP	Yes	Yes	Yes	Yes	Yes
Other Features	Power On Delay	Yes	Yes	Yes	Yes	Yes
	OSD Rotation	Yes	Yes	Yes	Yes	Yes
	No Signal Power Off	Yes	Yes	Yes	Yes	Yes
	Scheduler/Playlist	Yes	Yes	Yes	Yes	Yes
	Embedded USB Player	Yes	Yes	Yes	Yes	Yes
	RTC (Real Time Clock)	Yes	Yes	Yes	Yes	Yes
	Fallover	Yes	Yes	Yes	Yes	Yes
	Picture Shift	Yes	Yes	Yes	Yes	Yes
	Picture Calibration	Yes	Yes	Yes	Yes	Yes
	Panel Lock	Yes	Yes	Yes	Yes	Yes
	Lockable USB	No	Yes	Yes	Yes	Yes
	Built-in WiFi	No	Yes	Yes	Yes	Yes
	Open Browser	Yes	Yes	Yes	Yes	Yes
	Wireless Display	No	Yes	Yes	Yes	Yes
	Embedded Signage	Yes (TD-E323E model only)	Yes (TD-E433E model only)	Yes (TD-E493E model only)	Yes (TD-E553E model only)	Yes (TD-E653E model only)
	Built-in Memory	Yes (TD-E323E model only)*	Yes (TD-E433E model only)	Yes (TD-E493E model only)	Yes (TD-E553E model only)	Yes (TD-E653E model only)
	Scheduler/Playlist	Yes	Yes	Yes	Yes	Yes
HDMI Wake Up	Yes	Yes	Yes	Yes	Yes	
Ingress Protection	IP20/IP20	IP40/IP20	IP40/IP20	IP40/IP20	IP40/IP20	
Power Supply	Input	AC 100-240 V, 50/60 Hz	AC 100-240 V, 50/60 Hz	AC 100-240 V, 50/60 Hz	AC 100-240 V, 50/60 Hz	AC 100-240 V, 50/60 Hz
	Active Consumption	60W / 600mA	84W / 900mA	105W / 1.05A	111W / 1.1A	128W / 1.3A
	Standby Consumption	<0.5W	<0.5W	<0.5W	<0.5W	<0.5W
	Mains Plug Type	EU + UK	EU + UK	EU + UK	EU + UK	EU + UK
Operation	Operating Temperature	0 to +40	0 to +40	0 to +40	0 to +40	0 to +40
	Operating Humidity	0 - 90 %	0 - 90 %	0 - 90 %	0 - 90 %	0 - 90 %
Dimensions	Width (mm)	724.4	965.5	1101.7	1238.2	1459.4
	Width Bezel (mm)	10 mm (L/R/T), 14 mm (B)	5.9 mm (L/R/T), 9.5 mm (B)	6.8mm (L/R/T), 10.4mm (B)	7.0 mm (L/R/T), 10.3mm (B)	10.4 mm (L/R/T), 13.6mm (B)
	Height (mm)	424.2	557.3	634.6	711.8	841.2
	Depth (mm)	26	81.3	80.8	81.1	72
	Depth (mm) - including OPS slot	66	105.8	104.2	103.8	95.7
	Weight (kg)	9.5	105	13.5	17.5	26
	Packed Width (mm)	915	1077	1182	1361	1607
	Packed Depth (mm)	154	129	132	139	177
	Packed Height (mm)	585	764	749	847	980
	Packed Weight (kg)	13	14.5	17.5	22	33.5
	VESA - W x H (mm)	200 x 200 (M6)	200 x 200 (M6)	200 x 200 (M6)	400 x 200 (M6)	400 x 400 (M6)

* Via USB accessory.

Toshiba Europe GmbH. Product design and specifications are subject to change without notice and may vary from those shown. Errors and omissions excepted.